



HuiDa RC International Limited

Address: Building 2804, Phase 1, Zhonghai Triumph City, Jinshan Avenue, Sandong Town, Huicheng District, Huizhou City, Guangdong Province, China
E-mail: info@chd.hk Tel: +86-15220689692 WWW.CHD.HK

1. 使用環境條件

Apply Environmental Condition :

No.	項目 item	規格 standard
1-1	保存溫度 Storage Temperature Range	-20℃ ~ 60℃
1-2	操作溫度 Operating Temperature Range	-10℃ ~ 60℃
1-3	操作電壓 Operating Voltage Range	16.8V~25.2V

2. 測試環境

Standard Test Environment :

2-1	測試環境 Standard Test Environment	每一个检查必须是正常的温度和湿度进行测量, 温度 $25 \pm 5^{\circ}\text{C}$, 相对湿度 $65 \pm 10\%$, 在按照本规范的标准测试条件下判断特征。 Every characteristic of the inspect must be normal temperature and humidity carry out the test , temperature $25 \pm 5^{\circ}\text{C}$ and relative humidity $65 \pm 10\%$ of judgment made in accordance with this specification standard testing conditions.
-----	-----------------------------------	---

3. 外觀檢查

Appearance Inspection :

No.	項目 item	規格 standard
3-1	外觀尺寸 Outline Drawing	尺寸见附件 Dimension see the attachment
3-2	外觀 Appearance	无损坏, 不允许影响功能 No damage which affects functions allowed



Product Name
数字伺服器 Digital Servo

Model No.
WB-150KG

Version
V1

Page
1/3

4. 電 氣 特 性

Electrical Specification (Function of the Performance) :

No.	項目 item	16.8V	21.0V
4-1	空載轉速 Operating speed (at no load)	0.13 sec/60°	0.11 sec/60°
4-2	空載電流 Running current (at no load)	100 mA	100 mA
4-3	停止扭力 Stall torque (at locked)	100 kg-cm	122 kg-cm
4-4	停止電流 Stall current (at locked)	3500 mA	4100 mA
4-5	待機電流 Idle current (at stopped)	20 mA	20 mA

注：項目 4-2 定义平均值时，伺服器无负荷运行

Note: Item 4-2 definition is average value when the servo running with no load

5. 機 械 特 性

Mechanical Specification :

No.	項目 item	規格 standard
5-1	齒輪材料 Materials of the gear	鋼齒 Hardened Steel
5-2	機構極限角度 Limit angle	180°± 10°
5-3	重量 Weight	213 ± 1g
5-4	導線規格 Connector wire gauge	100/0.08mm JR+PHS2.0 7P
5-5	導線長度 Connector wire length	350 ± 5 mm
5-6	舵片規格 Horn gear spline	15T/ ϕ 7.60
5-7	舵片種類 Horn type	半臂，一字 Single, Double



Product Name

數字伺服器 Digital Servo

Model No.

WB-150KG

Version

V1




Page

2/3

6. 控制特性

Control Specification :

No.	項目 item	规格 standard
6-1	控制系統 Control system	改变脉冲宽度 Pulse Width Modification
6-2	放大器種類 Amplifier type	数字控制器 Digital Controller
6-3	操作角度 Operating travel	90° (在 1000→2000 μ sec)
6-4	中立位置 Neutral position	1500 μ sec
6-5	脈波訊號虛位 Dead band width	2 μ sec
6-6	旋轉方向 Rotating direction	顺时针 (在 1500→2000 μ sec) Clockwise (when 1500→2000 μ sec)
6-7	脈波寬度範圍 Pulse width range	800→2200 μ sec
6-8	可作動角度範圍 Maximum travel	大約 125° (在 800→2200 μ sec) Approx 125° (when 800→2200 μ sec)

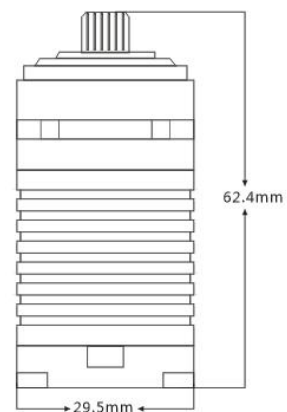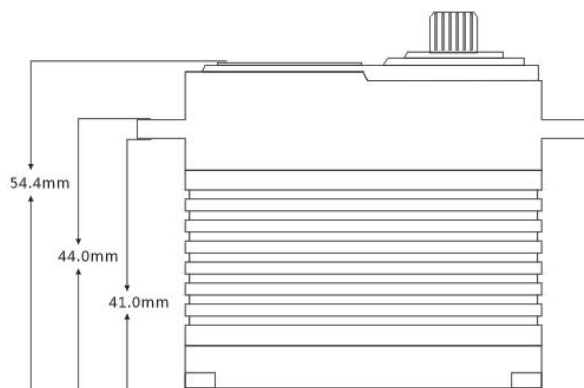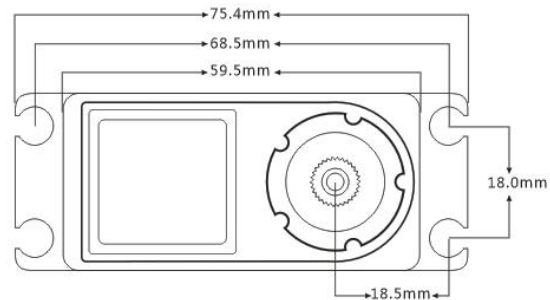

Product Name
数字伺服器 Digital Servo

Model No.
WB-150KG

Version
V1

Page
3/3